



SONY335 5MP Mini Dome POE IP Camera with 2.8MM

Model: 565695

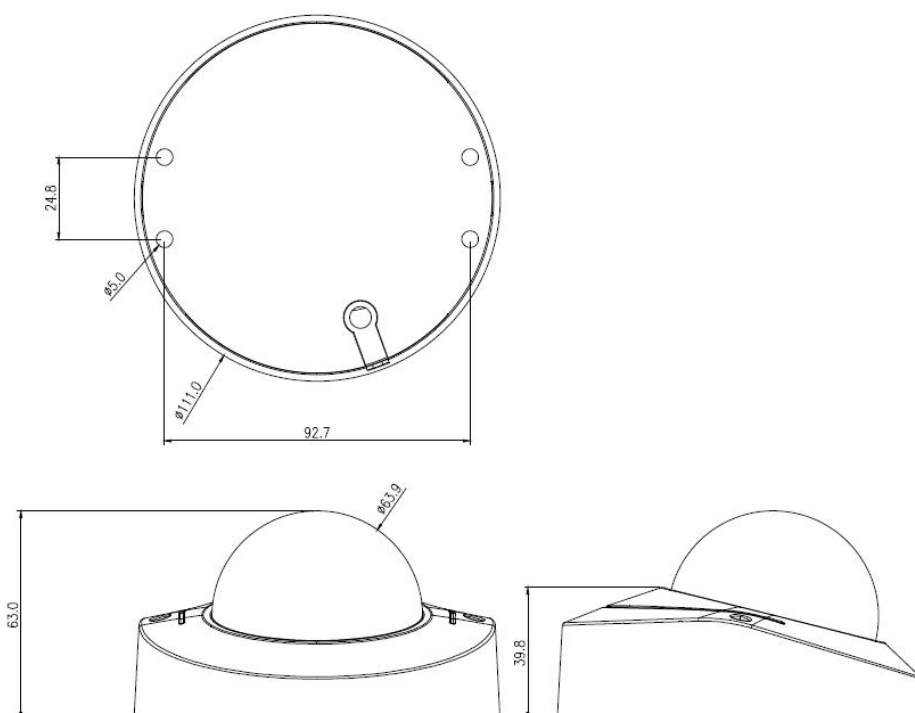

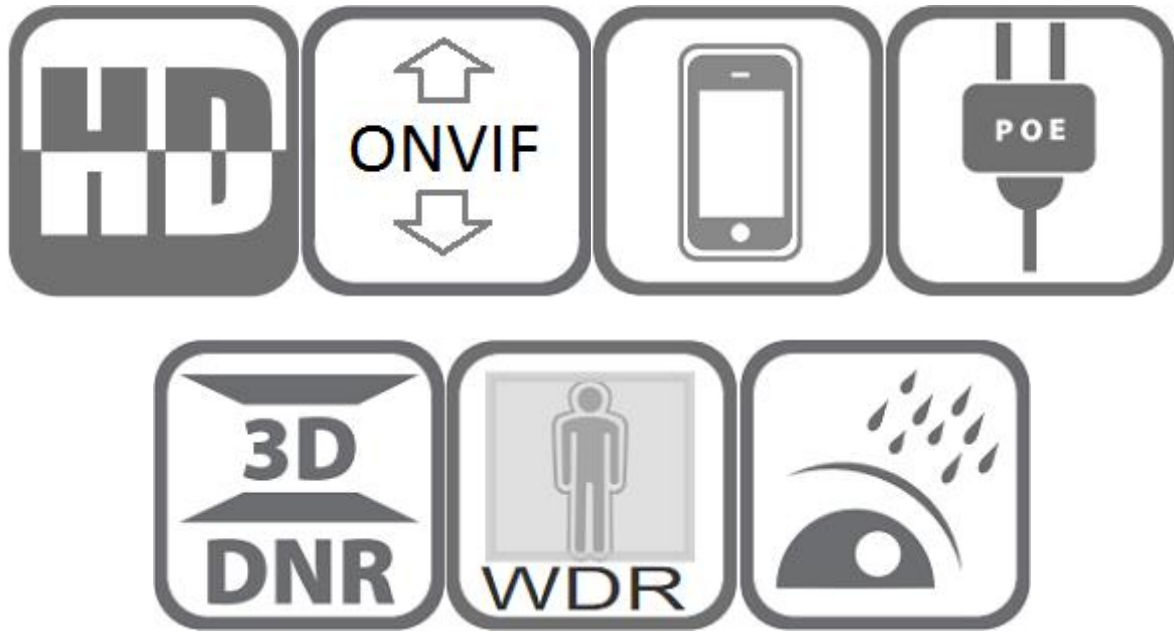

Features:

- 1/2.8" SONY335 CMOS sensor
- 5MP resolution, 25/30fps@5 MP(2592*1944)
- Low illumination 0.01Lux
- Day/Night, AWB/MWB,BLC, HLC, 2D/3D-DNR,Shutter, IR-CUT
- D-WDR,Mirror, rotate, Defogging
- Multiply Style OSD Overlay,Motion Detection, Privacy Mask
- RTSP and Onvif 17.06 compatible with many third-party NVR
- H.264/H.265 dual-stream media server
- Easy-to-use P2P Cloud service
- Support user authentication, video data encryption
- Support Alarm Snapshot to Email and FTP
- Multiply WEB browser IE,Firefox 32bit ESR, PC Client, Mobile APP remote access
- RJ45 100Mbps network port, IEEE802.3af PoE
- Lightning protection 4000V
- Strong water-proof housing, vandal-proof, IP66
- 10 pcs SMD Array IR Leds, IR distance 15 meters
- HD 2.8mm fixed lens
- Internal POE, IEEE802.3af PoE
- Build in Microphone
- Human & Vehicle Detection

Technical Specifications:

Model	565695
Camera	
Image Sensor	1/2.8" SONY335 CMOS
Effective Pixels	5 megapixels
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
BLC /HLC	Support
DNR	2D/3D DNR
Other	AGC,Motion Detection,Privacy Mask,Flip ,OSD overlay
Encode	
Embedded Solution	SSC30KQ
Video Standard	H.264/H.265
Video Resolution	Main Stream: 25fps@5MP(2592x1944)/4MP(2592x1520)/3MP, 30fps@1080P/720P Sub stream: 25fps@D1/VGA/360P/CIF, etc.
Video Bitrates	512Kbps - 12Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a
Built-in Mic	Yes
Smart Event	Motion Detection Human Detection Vehicle detection
IR Led	
IR Led	10 pcs SMD array IR Led
IR Distance	15M
Lens	
Focal length	2.8mm fixed lens
Optional Function	
PoE, audio, etc.	
Network Services	
Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP/NFS, etc.
P2P	Yes
Web	IE , Firefox (32bit esr), etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, POE optional
Power Supply	12 VDC ± 10%
Power Consumption	< 8 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH